



MERRY

STRIPPERS



STRIPPERS

VST80

< for VVF wire >




Blade adjusting dial is installed for adjustment of blade opening.



Applicable to 4 different sizes of VVF wires
($\phi 1.6 \times 2$, $\phi 1.6 \times 3$, $\phi 2.0 \times 2$, $\phi 2.0 \times 3$)



stripping outer sheath

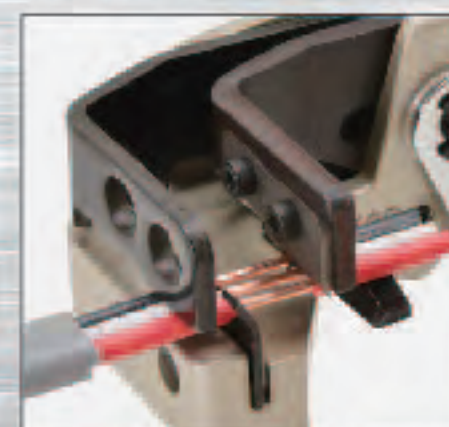

stripping inner sheath





finish

Model	Overall length (mm)	Weight (g)	Blade
VST80	190	380	VB80

VST50

< for VVF wire >

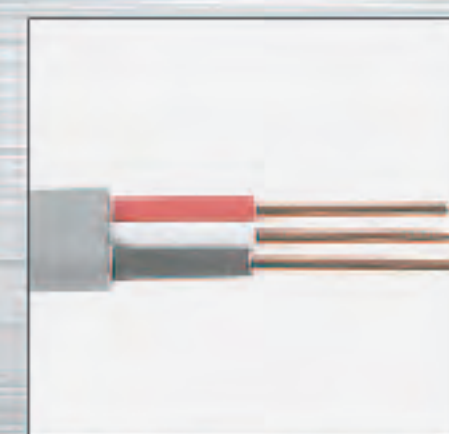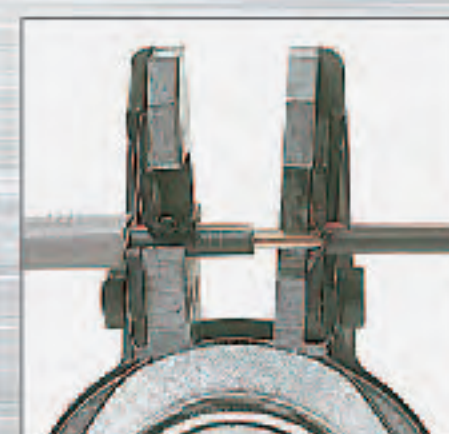

Model	Overall length (mm)	Weight (g)	Cutting capacity (ϕ mm) (VVF)(Outer coat)	Blade
VST50	185	500	1.6 2core wire/2.0 2core wire 1.6 3core wire/2.0 3core wire	VS51

VST25

< Mini wire stripper >


PAT. & PAT.P.in:
Japan, USA, Canada, Australia, UK,
France, Germany, Italy & Korea.




Handy stripper for non-step operation.

Applicable to single and multi-core wires of 0.05mm~3.5mm ($\phi 0.25 \sim 2.6$ mm).
(Stripping length can be adjusted.)

Slim and long head permits operation in narrow spaces.

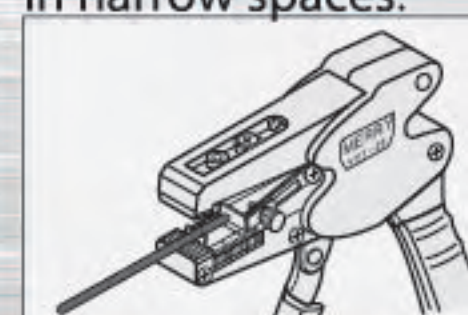

The V-shaped stripping blade allows easy clutching of the wire.

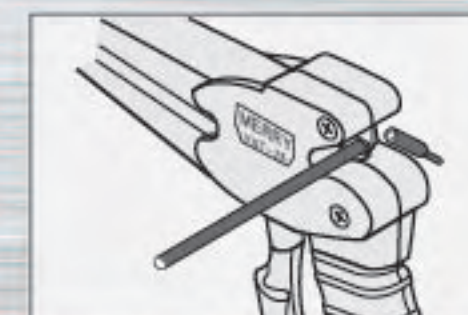


Wire cutting function is additionally provided.

Model	Overall length (mm)	Weight (g)	Stripping capacity (mm ²)	Blade	Cutting capacity (ϕ mm)	Blade
VST25	120	295	0.05~3.5 (AWG30~10)	VS20	2.6	VC25


LW25

< Heavy-duty cable stripper >


< Light in weight >

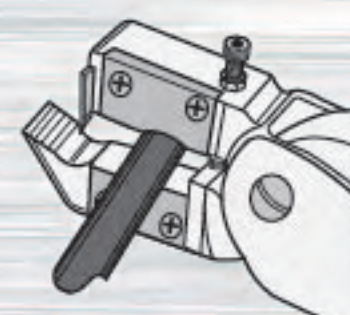

① Cut the wire protector crosswise by turning the cable several times.

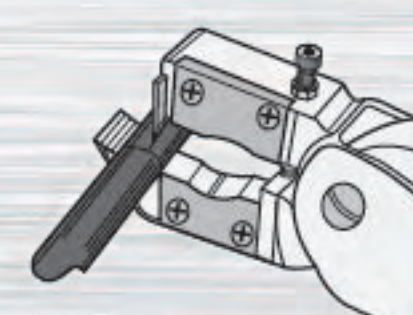


② Slit the wire protector length wise.

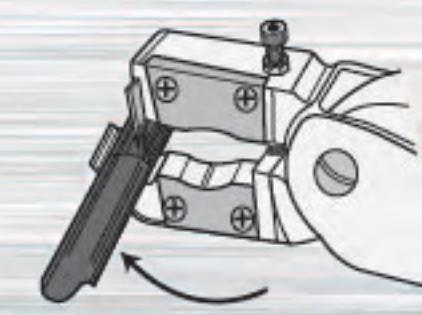

③ Strip out the cut skin of the protector with the blade by turning the cable. Use hand pliers when necessary.

No experienced professional skill is needed to strip large cables. Quick, safe and easy stripping achievement is assured.



Model	Overall length (mm)	Weight (g)	Stripping capacity	Blade Cross wise	Blade Length wise
LW25	195	245	Maximum $\phi 25$ mm of cable protector Minimum $\phi 8$ mm of core cable	LW25-1	LW25-2